(ACTUAL SIZE)
(GRANDEUR RÉELLE)
(TAMAÑO REAL)

1. INSTALLING YOUR ABOVEGROUND POOL

The pool must be installed only on level, firm (undug, non-filled) earth. We do not recommend backfilling or grading earth up against the pool wall or frame covering any part of them.

- Check local building codes for setback from house and property lines.
- Check regulations concerning fence height and position.
- Check above and below ground for existing gas, electric, telephone and water lines and any surrounding trees or bushes that might interfere with your pool location... remember tree roots and the leaves from trees can be a nuisance too near a pool.
- ERECTING A POOL ON BLACKTOP, TAR PAPER, ASPHALT, CONCRETE, GRAVEL, OR ANY SOIL CONTAINING SHARP OBJECTS WILL INVALIDATE LINER WARRANTY.**
- Soil should be removed to prevent irregular bottom and any unpleasant odor from decaying grass.
- Do not use any oil based weed killer on cleared ground as it could stain the liner. Use weed killer made specifically for swimming pool base applications.
- Material for bottom of pool should be fine and free of sharp objects.

RECOMMENDED MATERIALS:

- Fine (shell-free) sand or vermiculite.
- FOR HARD BOTTOM:**

- 6 parts of either material can be mixed with 1 part cement; applied dampened 2" (5 cm) thick, smoothed and packed with a trowel - Cove 4" (10cm) up wall around pool.

If NUTGRASS is prevalent in your area (ie. Southern USA) use special chemicals which kill nutgrass in pool areas. Consult your local hardware or lawn care company.

NOTE: pH and chlorine balance must be maintained at normal levels. Excessive pH change or chlorine load will result in liner fading, turning brittle and either fading or puckering. This is not covered under the manufacturer's warranty.

WINTERIZE your pool by reducing the amount of water in the pool to 1/2, adjust pH and chlorine to proper levels and cover.

NOTE: Water must be left in the pool at ALL times. Removal of the water from the pool will result in liner shrinkage which is NOT covered by the manufacturer's warranty.

2. STEPS TO INSTALL YOUR OVAL POOL (following numbers on installation sheet)

- 6 Tools required.
- 7 Layout, ground preparation and ground levelling (in areas prone to nutgrass (Southern U.S.) sterilize soil with approved chemical). Check and layout parts.
- 19 Preassemble angle and bottom brace on all buttress posts.
- 20 Fasten tension straps together and attach to bottom brace of buttress assembly. The number of straps and buttress assemblies are specific to each size of pool. Confirm with parts list and instructions.
- 25 - 30 To fasten bearing plate to buttress post, position over the straps pushing down on tension straps until bearing plate holes align with buttress post holes. Secure with proper hardware. Bend up tabs on bottom of bearing plates using a screwdriver and a hammer. No bottom track required on bearing plate – use tabs to hold wall.
- 31 - 36 Assemble connectors and tracks at ends of oval (note - no track required along bearing plate - use tabs to hold wall). Slide curved bottom track into notch and track guide at bottom of buttress post. Level and square the buttress assembly and tracks.
- 37 - 48 Position and level patio stones at connectors and at ends of buttress braces.
- 49 - 57 Add floor sand and unroll wall into track starting midway at a connector (#52-#53) - securing with pegs and string (or have 5-6 people hold wall up). Once unrolled, adjust tracks at connectors to make wall bolt holes line up. Secure wall with hardware using every hole (screw head on one side of wall). Do not use impact gun for wall screws. Minimum tightening torque of 60 inch pounds required. Tighten in 85 inch pounds using a screw head using duct tape.
- 58 - 59 Position and flatten the top edge in place.
- 60 - 62 Spread, smooth and compact sand floor finish with a cove at the wall.
- 63 - 68 Unroll liner, spread out, gather up and put inside pool, overlapping the wall until floor is free of wrinkles, adjust fit. Snap inner combing (2020) over liner and wall to secure liner. Overlap on liner may be folded up under the ledge - do not cut.
- 69 - 72 Install top tracks and connectors.
- 73 - 76 Install top ledges and caps.
- 77 - 80 Assemble skimmer/inlet, hoses and filter according to separate manufacturer's instructions.

NOTES: - POOL MUST BE BUILT ON SOLID, LEVEL AND NON-FILLED AREA.

ENSURE THE JOINT IS BEHIND A POST WITH THE SKIMMER AND INLET POSITIONED WHERE YOU WANT

THE FILTER (#54).

- ENSURE ALL WALL BOLTS ARE TIGHTENED SECURELY TO A MINIMUM TORQUE SPECIFICATION OF 5 FOOT POUNDS.

- DO NOT ASSEMBLE WALL ON A WINDY DAY.

* THIS INSTALLATION IS FOR AN OVERLAP LINER. FOR OTHER LINER TYPES, CHECK LINER BOX FOR INSTRUCTIONS.

3. ABOVEGROUND POOL PARTS LIST

	12' x 18'	12' x 24'	16' x 26'	16' x 32'
	(m) 5,60 x 3,70	7,30 x 3,70	8,00 x 4,90	9,80 x 4,90
(a) 6" (15 cm) Ledge #6710-07 32 5/8" (82,87 cm)	.4	.8	.8	.12
(a) 6" (15 cm) Ledge #6710-04 48 5/8" (123,51 cm)		.12		.12
(a) 6" (15 cm) Ledge #6710-12 46 7/8" (119,06 cm)	.10	.10		
(b) Upright Post #6720-52	.8	.10	.10	.10
(c) Buttress Angle Brace #7006		.10	.10	.14
(i) Buttress Bottom Brace #7007	.6	.10	.10	.14
(j) Wall Bearing Plate #7009	.6	.10	.10	.14
(k) Top & Bottom Track #6731-00	.2	.4	.4	.6
(l) Oval Top Track #6731-19 32" (81 cm)	.4	.8	.8	.12
(m) Inner Combing 56" (142,24 cm) (not included)	.11	.13	.16	.18
(n) Self Tapping Screw #12 x 1" (2,54 cm)	122	150	170	198
(o) 1/2" x 1" (12,70 mm x 2,54 cm) Bolt, Nut, Washer	12	20	20	28
(p) Buttress Hardware 1/4" x 20 x 5/8" (6,35 mm x 15,88 mm)	40	72	72	104
(q) Strap Hardware 1/4" x 20 x 5/8" (6,35 mm x 15,88 mm)	48	80	100	140
(r) Tension Strap 54 1/4" (137,80 cm) #18007				28
(s) Tension Strap 55 3/16" (140,18 cm) #18008	.9	.15		
(t) Liner		.1	.1	.1
(u) Steel Wall includes joinder screws (q)		.1	.1	.1
Installation Sheet		.1	.1	.1
Safety Stickers	.2	.2	.2	.2
Note: Top and Bottom Track #6731-00	-11	-11	-08	-08

indicate proper radius by inserting code in place of -00.

-11 -11 -08 -08

SIZE	DIAMETER	WALL LENGTH	PATIO BLOCKS 8" X 16" X 2"	MASON SAND
	(20 cm x 40 cm x 5 cm)			
12' x 18' ... (5,60 m x 3,70 m) ...	12' 1" x 18' 4 1/2" ... (5,60 m x 3,68 m)14	3/4 cubic yard	
12' x 24' ... (7,30 m x 3,70 m) ...	12' 1" x 23' 10 1/2" ... (7,28 m x 3,68 m)61' 7" ... (18,77 m) ...	1 cubic yard	
16' x 26' ... (8,00 m x 4,90 m) ...	16' 1" x 26' 5" ... (8,05 m x 4,89 m)71 2 3/4" ... (21,71 m) ...	20	1 1/2 cubic yards
16' x 32' ... (9,80 m x 4,90 m) ...	16' 1" x 31' 11" ... (9,73 m x 4,89 m)82 2 3/4" ... (25,06 m) ...	24	1 3/4 cubic yards

indicate proper radius by inserting code in place of -00.

-11 -11 -08 -08

4. ACTUAL SIZE

SIZE	DIAMETER	WALL LENGTH	PATIO BLOCKS 8" X 16" X 2"	MASON SAND
12' x 18' ... (5,60 m x 3,70 m) ...	12' 1" x 18' 4 1/2" ... (5,60 m x 3,68 m)50' 7" ... (15,42 m) ...	3/4 cubic yard	
12' x 24' ... (7,30 m x 3,70 m) ...	12' 1" x 23' 10 1/2" ... (7,28 m x 3,68 m)61' 7" ... (18,77 m) ...	1 cubic yard	
16' x 26' ... (8,00 m x 4,90 m) ...	16' 1" x 26' 5" ... (8,05 m x 4,89 m)71 2 3/4" ... (21,71 m) ...	20	1 1/2 cubic yards
16' x 32' ... (9,80 m x 4,90 m) ...	16' 1" x 31' 11" ... (9,73 m x 4,89 m)82 2 3/4" ... (25,06 m) ...	24	1 3/4 cubic yards

indicate proper radius by inserting code in place of -00.

-11 -11 -08 -08

5. SAFETY CONSIDERATIONS

NO DIVING, NO JUMPING, SHALLOW WATER

DIVING or diving into a pool or any aboveground pool is strictly forbidden.

CHILDREN MUST BE SUPERVISED AT ALL TIMES.

Put "DO NOT JUMP OR DIVE" signs around the pool where they are fully aware of the "DO NOT JUMP OR DIVE" signs.

DO NOT allow anyone into the pool unless they are fully aware of the "DO NOT JUMP OR DIVE" signs.

JUMPING OR DIVING into the pool MAY CAUSE PERMANENT INJURY, PARALYSIS OR DEATH.

NO DIVING. No diving equipment allowed. No diving from deck level, top ledges or ladders.

No diving from garages, trees, porches, etcetera.

NO JUMPING. No sliding equipment allowed.

DO NOT swim during thunder, electrical or wind storms. Closely supervise children at all times.

DO NOT allow running or horseplay around the pool.

Never swim when alone, under the influence of drugs or alcohol, tired or ill.

Keep deck clean and clear of objects that may create a tripping hazard.

DO NOT allow glass or sharp objects around the pool.

DO NOT allow climbing, sitting, standing or walking on the top ledges of the pools. Parents should learn C.R.P. Keep all electrical radios, speakers, telephones and other electrical appliances away from the swimming pool (electric shock can kill). All electrical outlets must be a safe distance, 5 to 10 feet (2m - 3m), from the outside perimeter of the wall of the pool. Consult local electrical authority for local regulations (Bylaws).

DO NOT use extension cords around the pool area and deck (electric shock can kill). Access to the swimming pool must be secured and locked when pool is not in use to prevent accidental drowning and unauthorized entry. It is the responsibility of the owner of a pool (or any aboveground pool) not the manufacturer, to ensure the safety of everyone using the pool.

The owner is also responsible to provide warnings (verbal and signage) to all users of the pool advising NO DIVING OR JUMPING INTO AN ABOVEGROUND POOL.

ENFORCE ALL SAFETY RULES.

For winterizing instructions, please contact your pool dealer or the manufacturer.



1. INSTALLATION DE VOTRE PISCINE HORS-SOL

Ces piscines doivent être installées seulement hors-sol et sur un sol ferme (non-creusé, non-relleno). Nous ne recommandons pas de remplir la piscine avec de l'eau ou de la sable. Nous recommandons de remplir la piscine avec de l'eau ou de la sable.

- Vérifiez les règlements concernant la distance requise entre la piscine, votre maison et vos limites de propriété.

- Inspectez votre terrain pour détecter les câbles téléphoniques souterrains, des tuyaux de gaz ou d'eau, et des arbres ou buissons qui peuvent nuire à l'emplacement de votre piscine.

L'INSTALLATION D'UNE PISCINE SUR DU PAPIER EN GOUARDON, DE L'ASPHALTE, DU BÉTON, DU GRAVIER OU TOUT SOL CONTENANT DES OBJETS TRANCHANTS ANNULE LA GARANTIE.

- Le gazon doit être enlevé pour vous assurer d'un fond régulier et aussi afin d'éviter l'odeur désagréable émanant de l'herbe en décomposition.

- NE EMPLOYEZ PAS d'herbicide à base huileuse sur le sol car cela peut tacher le liner. Utilisez un herbicide spécialement conçu pour usage en applications pour des piscines.

- Les matériaux pour le fond de la piscine doivent être fins et dépourvus d'éléments tranchants.


MATÉRIAUX RECOMMANDÉS: - du sable fin (sans coquilles) ou du vermiculite.

- Afin d'obtenir un fond ferme chacun de ces matériaux peut être mélangé à du ciment dans une proportion de 6 à 8; appliquer humide (épaisseur de 5 cm); étendu et tassé avec une truelle en remontant de 10 cm le long de la paroi tout autour de la piscine.


Si le souchet comestible est répandu dans votre région (par exemple, dans le sud des États-Unis), stérilisez le sol avec un produit chimique spécifique qui détruit le souchet.

NOTA: L'équilibre du pH et du chlore doit être maintenu à des niveaux normaux. Un changement excessif du pH ou un excès de chlore résultera en une décoloration de la toile, une fragilité du tissu, ainsi qu'un plissement de la toile. Ces défauts ne sont pas couverts par la garantie du fabricant.

HIVERNEZ votre piscine en réduisant de moitié la quantité d'eau contenue dans la piscine, ajustez les niveaux de pH et de chlore aux niveaux appropriés et recouvrez la piscine. NOTA: Il faut toujours laisser de l'eau

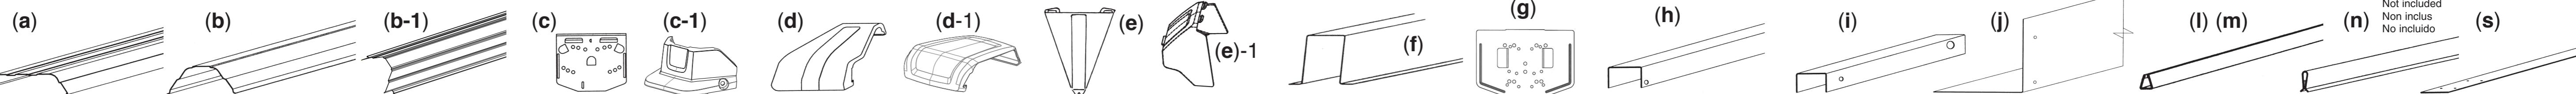

cluded
nclus
eluido

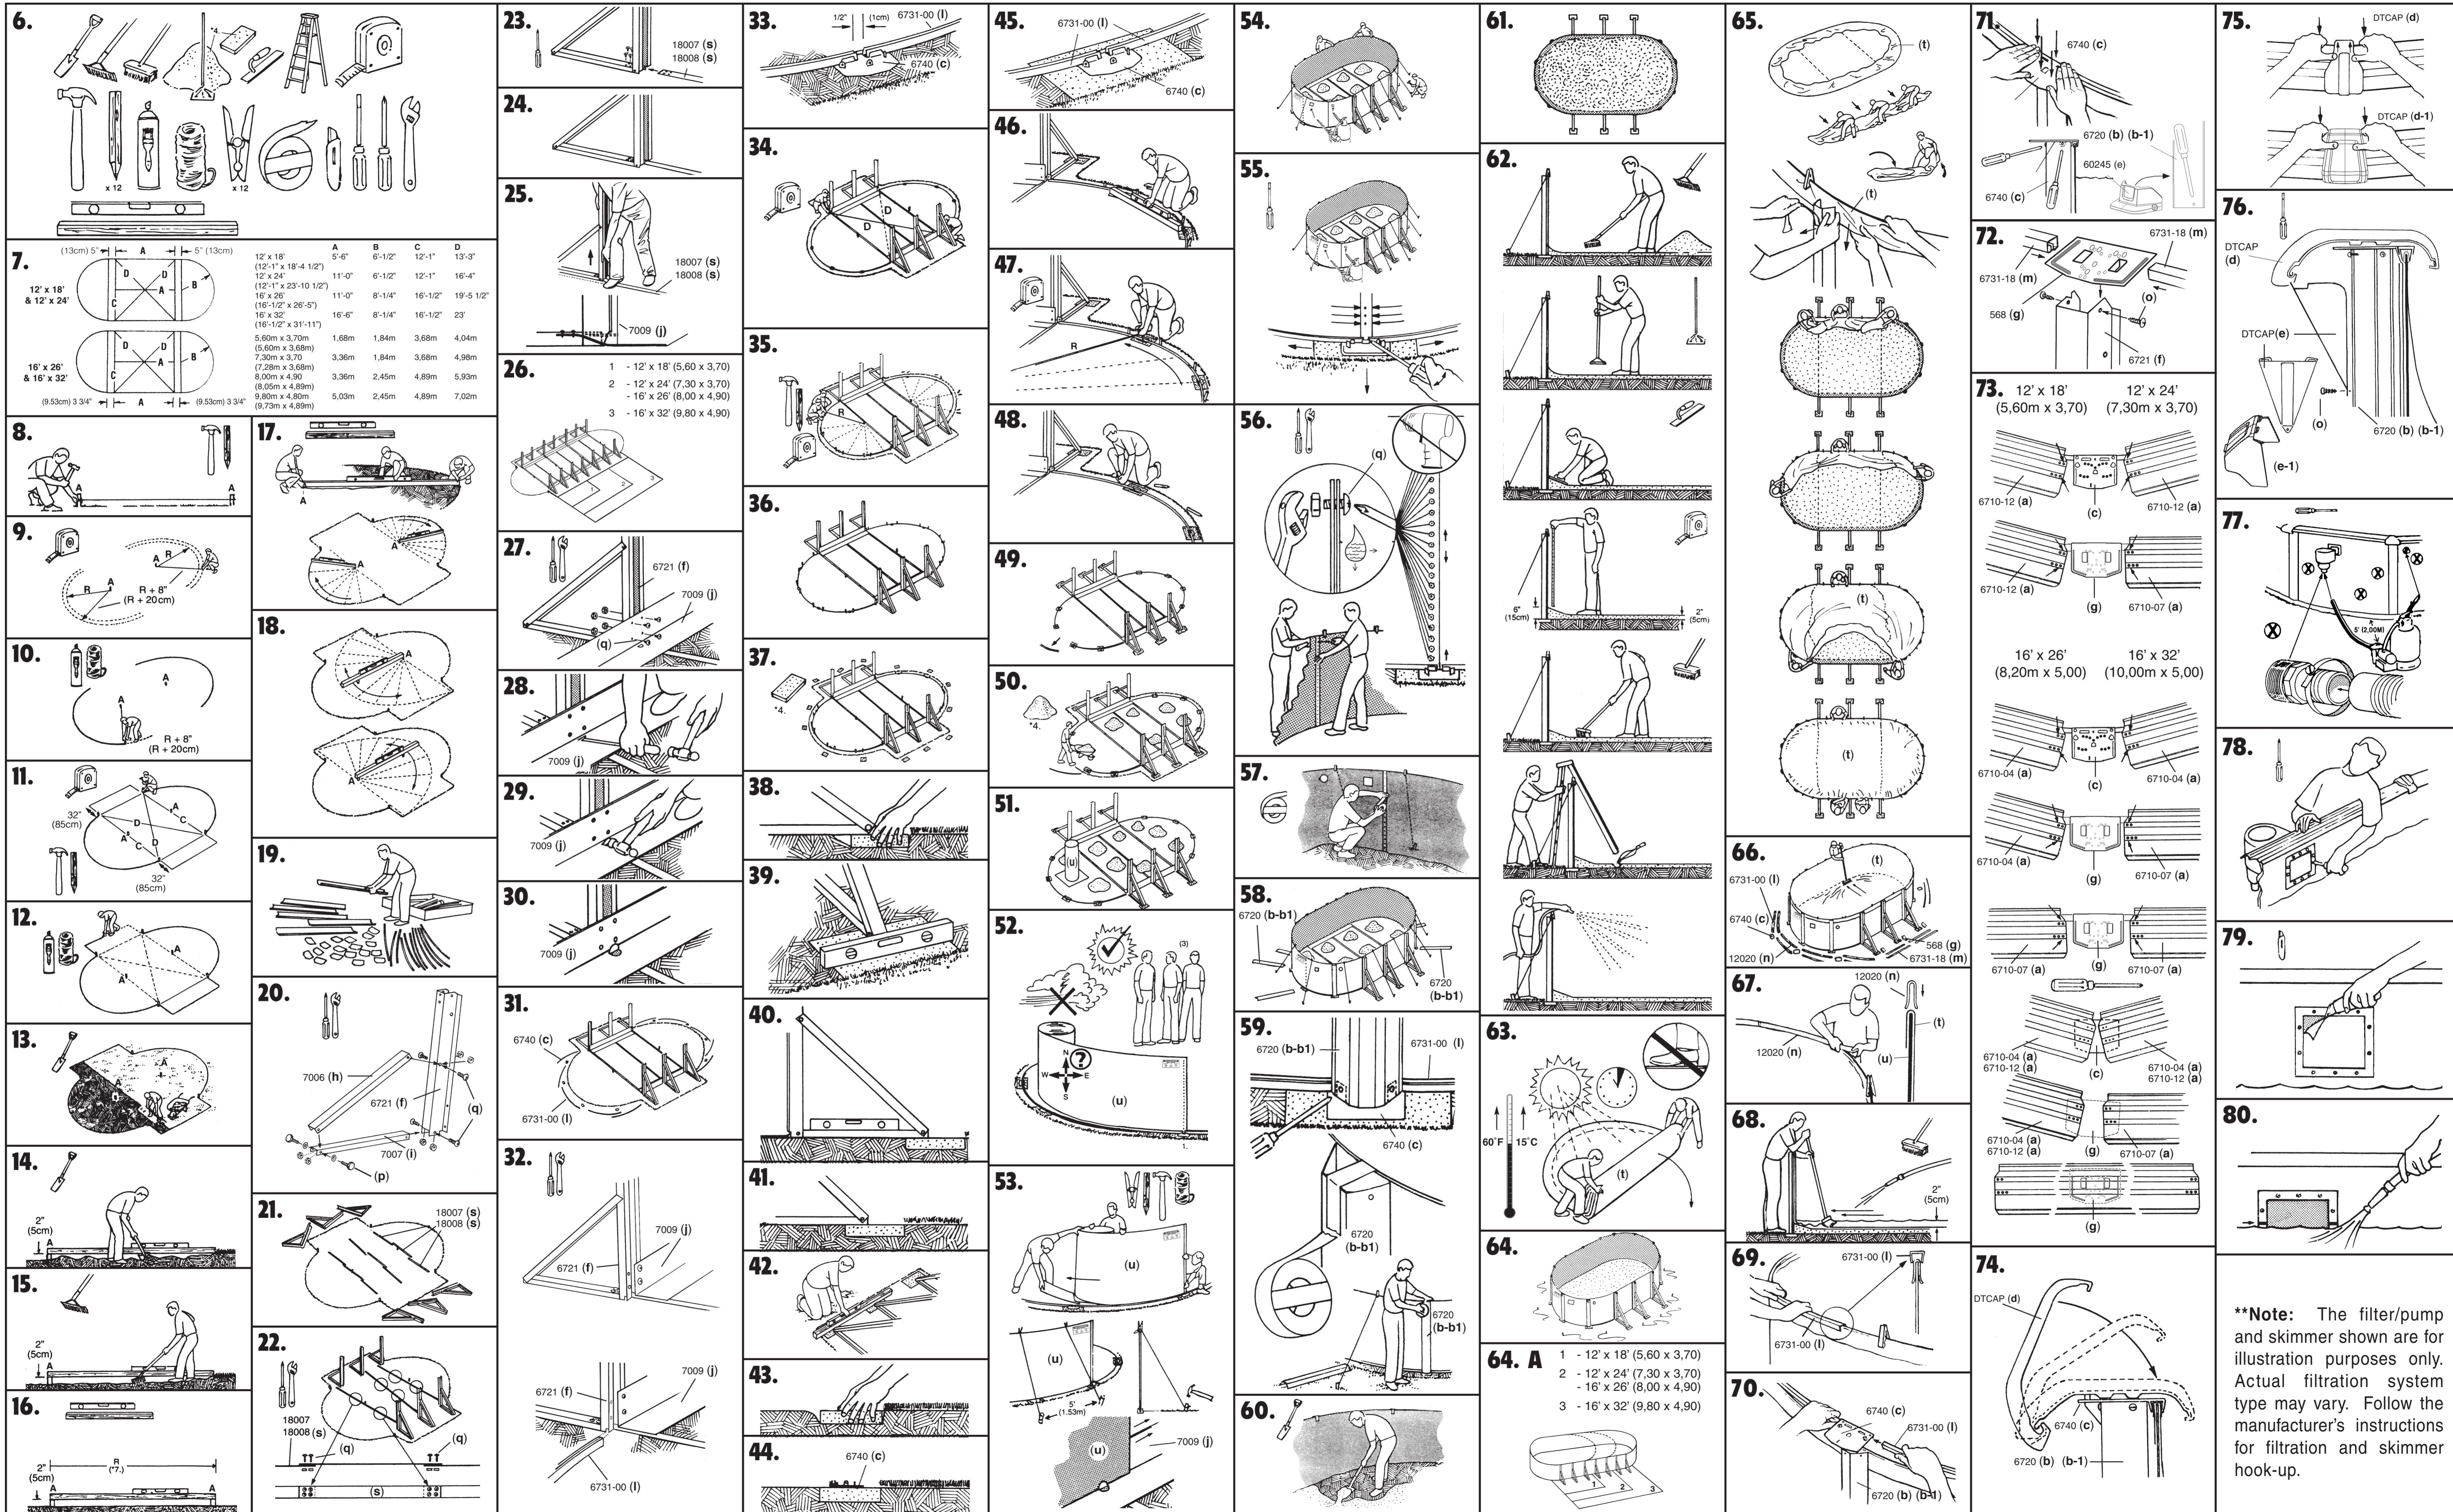

****Note:** The filter/pump and skimmer shown are for illustration purposes only. Actual filtration system type may vary. Follow the manufacturer's instructions for filtration and skimmer hook-up.